



mm P112
Gauge Head Position Sensor

FEATURES

- Gauge head positioning for industrial and scientific applications
- Non-contacting inductive technology to eliminate wear
- Travel set to customer's requirement
- Compact 19 mm diameter body
- Sealing to IP67



P112-17r

Our P112 LIPS® (Linear Induction Position Sensor) is an affordable, durable high-accuracy sensor for gauge head positioning in industrial and scientific applications. The P112, like all sensors, provides a linear output proportional to travel. Each sensor is supplied with the output calibrated to the travel required by the customer, from 5mm to 50mm and with full EMC protection built in.

It is particularly suitable for OEMs seeking good sensor performance for arduous applications such as industrial machinery where cost is important. Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor is very robust, the body and plunger being made of stainless steel for long service life and environmental resistance.

The plunger is spring loaded with a domed end. The P112 is easy to install with a long 1/2 inch UNF mounting thread and is supplied with two lock nuts for positioning. Environmental sealing is to IP67.

SPECIFICATION

Dimensions

Body diameter	19 mm
Body Length (excluding thread)	
(Axial version)	160.7 mm
(Radial version)	166 mm cable
(Radial version)	169.5 mm connector
Mounting Thread Length	59 mm
For full mechanical details see drawing P112-11	

Spring Force 1.5 - 4.5 N approx.

Independent Linearity $\leq \pm 0.25\%$ FSO @ 20°C
 $\leq \pm 0.1\%$ FSO @ 20°C available upon request.

*Sensors with calibrated travel of 10 mm and above.

Temperature Coefficients $< \pm 0.01\%$ /°C Gain &
 $< \pm 0.01\%$ FS/°C Offset

Frequency Response > 10 kHz (-3dB)

Resolution Infinite

Noise $< 0.02\%$ FSO

Environmental Temperature Limits

Operating	-40°C to +12.5°C standard
	-20°C to +85°C buffered
Storage	-40°C to +12.5°C

Sealing IP67

EMC Performance EN 61000-6-2, EN 61000-6-3

Vibration IEC 68-2-6: 10 g

Shock IEC 68-2-29: 40 g

MTBF 350,000 hrs 40°C Gf

Drawing List

P112-11	Sensor Outline
Drawings, in AutoCAD® dwg or dxf format, available on request.	

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

How PIPS® technology eliminates wear for longer life

The PIPS® technology is a major advance in displacement sensor design. PIPS®-based displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT.

PIPS® technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A PIPS® sensor, based on simple inductive coils using ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life.

PIPS® overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials. It requires no separate signal conditioning.

Our LIPS® range are linear sensors, while RIPS® are rotary units and TIPS® are for detecting tilt position. Ask us for a full technical explanation of PIPS® technology.

We also offer a range of ATEX-qualified intrinsically safe sensors.

TABLE OF OPTIONS

CALIBRATED TRAVEL: Factory set to any length from 0-5mm to 0-50mm (e.g. 36mm).


ELECTRICAL INTERFACE OPTIONS

OUTPUT SIGNAL	SUPPLY INPUT	OUTPUT LOAD
Standard: 0.5-4.5V dc ratiometric	+5V dc nom. ± 0.5V.	5kΩ min.
Buffered: 0.5-4.5V dc	+24V dc nom. + 9-28V.	5kΩ min.
0.5-9.5V dc	+24V dc nom. + 13-28V.	5kΩ min.
4-20mA	+24V dc nom. + 13-28V.	300R Max.
Supply Current	10mA typical, 20mA max. plus O/P current	


CONNECTOR/CABLE OPTIONS

Connector - Hirschmann ELWIK 4102 Axial, IP67
 Connector - Hirschmann ELWIK 4102 Radial, IP67
 Cable with Pg 9 gland Axial, IP67
 Cable with boot. Radial, IP67
 Cable length >50 cm – please specify length in cm

Output Characteristic - Standard

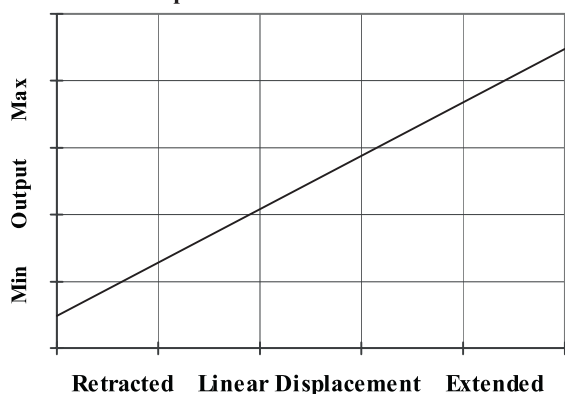

Output Characteristic - Reverse option

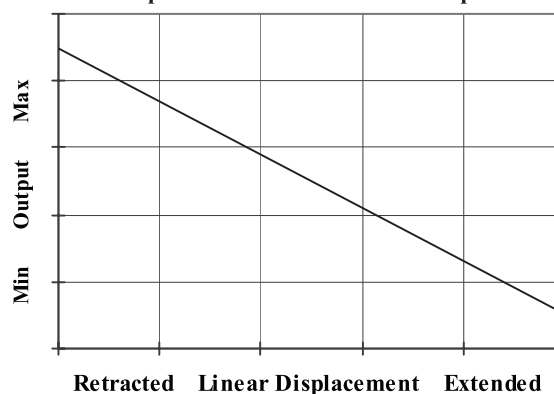



■ HOW TO ORDER




P112 . Displacement Output Connections Z-code

a Displacement (mm)		Value
Displacement in mm	e.g. 0 - 34 mm	34
b Output		
Supply V dc V _s (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	A
+24V nom. (13 - 28V)	0.5 - 9.5V	C
+24V nom. (9 - 28V)	0.5 - 4.5V	G
+24V nom. (13 - 28V)	4 - 20mA 3 wire Source	H
c Connections Cable* or Connector		Code
Cable Boot - Radial	IP67	Ixx
Connector - Axial	IP67 M12 IEC 60947-5-2	J
Connector - Radial	IP67 M12 IEC 60947-5-2	K
Cable Gland - Axial	IP67 Pg9	Lxx
*Supplied with 50 cm as standard, specify required cable length specified in cm. e.g. L2000 specifies cable gland with 20 metres of cable. Nb: restricted cable pull strength.		
d Z-code		Code
≤± 0.1% @20°C Independent Linearity displacement between 10mm & 50mm only!		Z650
Connector with cable option 'J' or 'K' with length required in cm i.e. J100 specifies connector with 100cm of cable.		Z999

INSTALLATION INFORMATION

Output Option	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance: (include leads for 4 to 20mA O/Ps)
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	$\geq 5k\Omega$
C	0.5 - 9.5V	+24V nom. (13 - 28V)	$\geq 5k\Omega$
G	0.5 - 4.5V	+24V nom. (9 - 28V)	$\geq 5k\Omega$
H	4 -20mA	+24V nom. (13 - 28V)	300R MAX

Not all output options available - see product datasheet for full options list

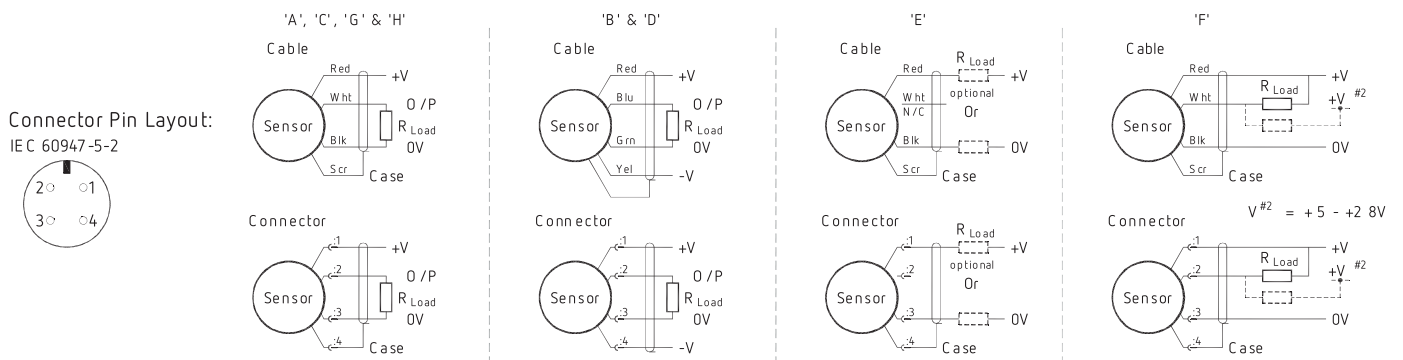

Mechanical Mounting: Via 1/2" x20 UNF mounting thread, adjust sensor position and lock in place using lock nuts provided. Maximum tightening torque: 10Nm.

Output Characteristic: Plunger is extended 3.3 mm from end of body at start of normal travel. The output increases as the plunger extends from the sensor body, the calibrated stroke is between 5 mm and 50 mm.

Warning - The M12 IEC 60947 connector may be rotated for purposes of convenient orientation of the connector and cable, however rotating the connector more than one complete revolution is not recommended.

Repeated rotation of the connector will damage the internal wiring!

Incorrect Connection Protection levels:-

- A **Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.
- C & G Supply leads diode protected. Output must not be taken outside 0 to 12V.
- H Supply and output lead diode protected. Do not take output negative of 0 volts.

