



mm PT5E

Description

- Absolute Linear Position to 250 inches (6350 mm)
- Hard Anodized Aluminum Enclosure
- High Cycle Applications
- IP67 · NEMA 6 Protection




The PT5E encoder-based cable-extension transducer offers a unique thermoplastic cable that has virtually an infinite fatigue life. This cable, known as V62, has properties that are superior for high cycle and rugged applications.

Like our other transducers, the PT5E installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5E offers additional installation flexibility since its cable exit can be rotated relative to the mounting surface, providing four different cable exit orientations.

GENERAL

Full Stroke Range Options	0-50 to 0-250 inches
Output Signal Options	incremental encoder (quadrature)
Accuracy	see ordering information
Repeatability	see ordering information
Resolution	10 to 250 pulses per inch
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	hard anodized aluminum
Sensor	optical encoder
Maximum Measuring Cable Velocity	see ordering information
Maximum Retraction Acceleration	see ordering information
Weight	5 lbs. max.

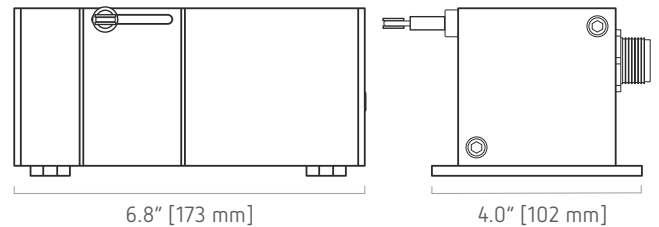


ELECTRICAL

Input Voltage	see ordering information
Input Current	see ordering information

ENVIRONMENTAL



Enclosure	NEMA 4/6, IP 65/67
Operating Temperature	0° to 160°F (-17° to 71°C)
Vibration	up to 10 g to 2000 Hz maximum

Output signal

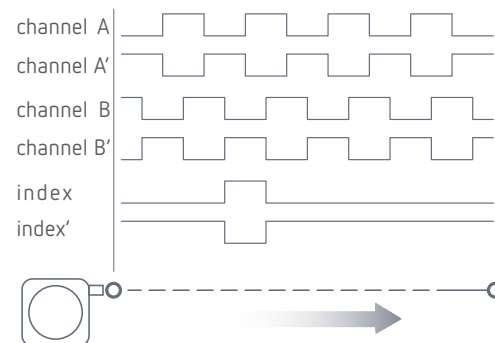


-- see ordering information for available channels

Outline Drawing

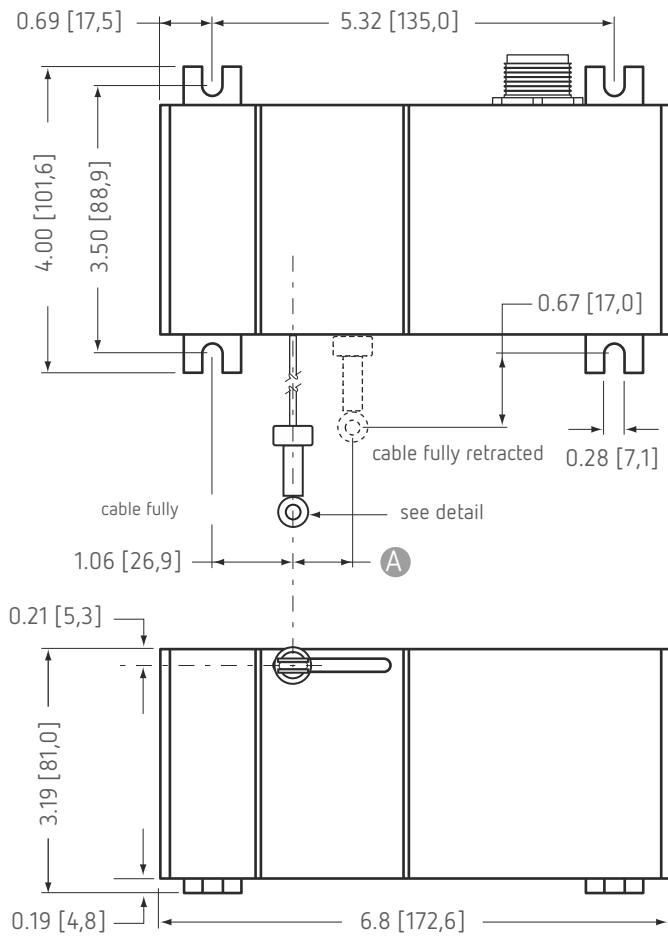

A DIMENSION (inches[mm])

RANGE	DIMENSION (inches[mm])	
	N34 measuring cable	S47 & V62 measuring cable
50	0.23 [5,9]	0.39 [9,9]
100	0.46 [11,7]	0.78 [19,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

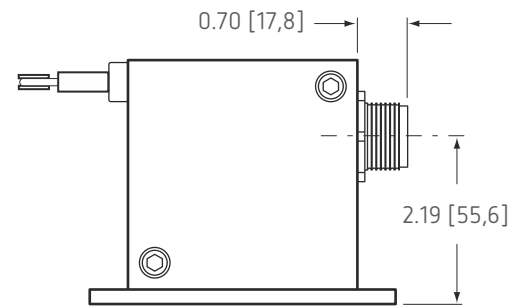

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 - .001 [+.13 - .03]
** tolerance = +.005 - .005 [+.13 - .13]

Ordering Information:

Model Number:

PT5E - - - - -
order code: **R** **A** **B** **C** **D** **E**

Sample Model Number:

PT5E - 100 - N34 - FR - 100 - AB-TTL - M6

- R** range: 100 inches
- A** measuring cable: .034 nylon-coated stainless
- B** cable exit: front
- C** resolution: 100±2 pulses per inch
- D** output signal: TTL/CMOS compatible driver
- E** electrical connection: 6-pin plastic connector

Full Stroke Range:

R order code:	50	100	150	200	250	1250	2500	3750	5000	6250
full stroke range, min:	50 in.	100 in.	150 in.	200 in.	250 in.	1250 mm	2500 mm	3750 mm	5000 mm	6250 mm
Δ accuracy (± % of f.s.):	.1	.07	.06	.05	.04	.1	.07	.06	.05	.04
repeatability (± % of f.s.):	.02	.01	.01	.01	.01	.02	.01	.01	.01	.01
cable tension (±)	41 ounces				21 ounces		11,4 N		5,8 N	
max. cable velocity · acceleration:	300 in./sec · 5 g			120 in./sec · 2 g		8 M/sec · 5 g			3 M/sec · 2 g	

12.2015 | version 20140328 - Rev 6.0

■ Ordering Information (cont.)

Measuring Cable:

A order code:	N34	S47	V62
	.034 nylon-coated stainless steel available in all ranges	.047 stainless steel all ranges up to 150 inches	.062 thermoplastic all ranges up to 150 inches

Cable Exit:

B order code:	UP up	DN down	FR front	BK back
	inches [mm]			

Resolution:

● _____

● _____

Output Signals:


D order code:	AB-TTL	AB-OC	ABC-LD	ABC-UD	ABZC-UD
output driver:	TTL/CMOS compatible	open collector	5-volt line driver	universal line driver (no index)	universal line driver (with index)
input voltage:	4.5...13.2 VDC	10.8...26.4 VDC	5 VDC	5...30 VDC	5...30 VDC
max. source/sink current:	20 mA sink	20 mA sink	20 mA sink	20 mA source/sink	20 mA
max. input current:	source/sink 80 mA	80 mA	150 mA	100 mA, no load	100 mA, no load

Ordering Information (cont.)


Electrical Connection:

order code:	MC4	M6	M6M	M18	C25
-------------	-----	----	-----	-----	-----


4-pin micro-connector with 12 ft [3.5 M] cord set IP 67, NEMA 6




6-pin plastic connector with mating plug IP 67, NEMA 6




6-pin metal connector with mating plug IP 65, NEMA 4



18-pin plastic connector with mating plug IP 67, NEMA 6



25-ft. instrumentation cable 24 AWG, shielded IP 67, NEMA 6



4-pin cordset:



contact view

pin	color code	TTL / CMOS Open Collector
1	RED-BLK TR.	input voltage
2	RED-WHT TR.	channel A
3	RED	channel B
4	GREEN	common

6-pin mating plug:



contact view

	TTL / CMOS Open Collector	5 V Line Driver pin Universal Line Driver
A	input voltage	input voltage
B	common	common
C	channel A	channel A
D	channel B	channel B
E	-	channel A'
F	-	channel B'


18-pin mating plug:



contact view

	TTL / CMOS Open Collector	5 V Line Driver pin Universal Line Driver
1	input voltage	input voltage
2	common	common
3	channel B	channel B
6	channel A	channel A
7	-	index
11	-	channel B'
12	-	channel A'
15	-	index'

25-ft. instrumentation cable:



color	TTL / CMOS Open Collector	5 V Line Driver pin Universal Line Driver
red	input voltage	input voltage
black	common	common
green	channel A	channel A
white	channel B	channel B
Blue	-	channel A'
brown	-	channel B'
yellow	-	index
Orange	-	index'

Δ Total accuracy includes uncertainty due to resolution and is calculated: $\{ \pm [(% FS)(FS) + \text{length of 1 p u lse}] \}$

Example: Model Number: FDPT5E-100-N34-FR100-AB-TTL-M6
Full Stroke: 100 inches
Accuracy: $[.07\% (100 \text{ in.}) + 1/100 \text{ in.}] = \pm .08 \text{ inches}$

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.

Althen – Your expert partner in Sensors & Controls | althensensors.com

Althen stands for pioneering measurement and custom sensor solutions. In addition we offer services such as calibration, design & engineering, training and renting of measurement equipment.

Germany / Austria / Switzerland
info@althen.de

Benelux
sales@althen.nl

France
info@althensensors.fr

Sweden
info@althensensors.se

USA / Canada
info@althensensors.com

Other countries
info@althensensors.com