

SG-2K-IP

Dual Channel Strain Gauge Amplifier

- Supply voltage 10 ... 18 VDC / 18 ... 30 VDC
- Analogue output 0 ... 10 V / ± 10 V / 4 ... 20 mA
- EMC Aluminium die-cast enclosure (IP65)
- Dimensions (W x H x D) 220 x 140 x 70 mm
- Galvanically isolated



The dual-channel strain gauge measuring amplifier SG-2K-IP allows supply and signal evaluation of two connected transducers with a strain gauge full bridge greater than 300 ohms. Input and output are galvanically isolated. The connection is done in 4-wire technology. For further evaluation standard analogue outputs are available. The measuring amplifier is built-in into a robust EMC die-cast aluminium enclosure (IP65) which is suited for application in rough and industrial environments.

The amplification/channel of the amplifier can be adapted by an internal precision resistance.



The potentiometers Zx (Zero) and Gx (Gain) which are accessible after removing the enclosure cover allow a calibration correction for each channel.

By the means of an internal dip switch/channel a change of the range of the potentiometer Zx (zero) can be reached. To allow a zero range shift a basic load / tare can be suppressed by a resistance electrically.

Technical Data

Number of measuring channels:	2 (full bridge resistance >300 Ω)
Supply voltage:	10 ... 18 VDC, 18 ... 30 VDC, electronics protected against voltage reversal
Isolating proof voltage input to output:	200 V, higher isolated proof voltage on request
Power consumption:	max. 5 W
Strain gauge excitation supply:	+5 VDC, +10 VDC
Analogue output:	0 ... 10 V, ± 10 V max. 1 mA (short-period short-circuit proof) 4 ... 20mA (max. 500 Ω) and 0 ... 10V (max. 1mA, max. 30mV Offset)
Limit frequency (-3 dB):	1 kHz, optional up to 30 kHz
Input resistance:	>3 M Ω
Max. input sensitivity:	100 mV/V at ± 5 VDC excitation supply
Non-linearity:	± 0.05 % FSO
Electrical connection:	EMC-cable gland on internal terminal block
Enclosure:	EMC-aluminium die-cast enclosure (IP65)
Dimension (W x H x D):	220 x 140 x 70 mm
Weight:	approx. 1500 g
Temperature, storage:	-20 ... +60 $^{\circ}$ C
Temperature, operating:	-20 ... +50 $^{\circ}$ C

Enclosure Dimensions

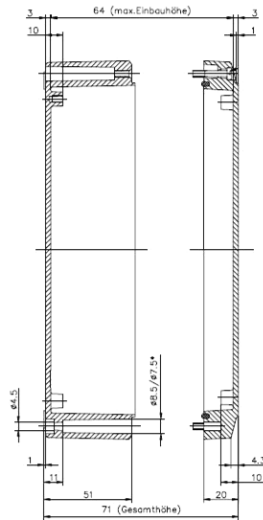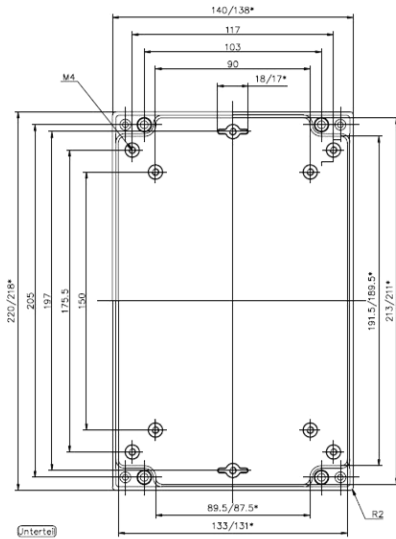

Terminal Wiring

Electrical connections are made via cable glands on a terminal block located inside of the enclosure. The terminal numbering is stated on the board. The maximum cable cross section amounts 2.5 mm². EMC installation information must be followed.

Note:

The amplifier has to be operated with closed cover only.

Terminal	Description
1	Supply Voltage
2	Supply Ground
3	Supply Ground
Galvanic isolation	
4	Analogue Ground
5	Analogue Output 1 (0 ... +10 V, ±10 V / opt. 4 ... 20 mA)
6	Analogue Ground
7	Analogue Output 2 (0 ... +10 V, ±10 V / opt. 4 ... 20 mA)
8	Analogue Ground

Terminal	Description
9	Screen / Enclosure
10	+ SG Excitation Transducer Ch-1
11	- SG Excitation Transducer Ch-1
12	+ SG Signal Transducer Ch-1
13	- SG Signal Transducer Ch-1
14	Screen / Enclosure
15	+ SG Excitation Transducer Ch-2
16	- SG Excitation Transducer Ch-2
17	+ SG Signal Transducer Ch-2
18	- SG Signal Transducer Ch-2

Terminals "Supply Ground" and "Analogue Ground" are galvanically isolated. To eliminate galvanic isolation the terminals 3 and 4 have to be bridged externally.

Ordering Description

SG-2K-IP-...	Dual channel strain gauge amplifier in a EMC aluminium die-cast enclosure (IP65)
...-12E-...	Supply voltage: 10 ... 18 VDC
...-24E-...	Supply voltage: 18... 30 VDC
...-010-...	Analogue output: 0 ... 10 V
...-B10-...	Analogue output: ±10 V
...-420-...	Analogue output: 0 ... 10 V and 4 ... 20 mA
...-GFxx	Limit frequency optionally up to 30 kHz
blank	Standard version 1 kHz

Alignment / Calibration

On request, a pre-setting of the measuring system or a factory calibration certificate with traceable references can be carried out for an extra charge.

Customized Requirements

Technical modifications according to customized requirements are available on request. Moreover, we deliver customized special solutions for a lot of measuring tasks in the section pressure, force, position and tilt measuring using our measuring transducers. Do not hesitate to contact us.

Due to continuous product development, ALTHEN and partners reserve the right to vary the foregoing details without prior notice.

Page 2/3
Version 2.03, 06/2015

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.

Althen – Your expert partner in Sensors & Controls | althensensors.com

Althen stands for pioneering measurement and custom sensor solutions. In addition we offer services such as calibration, design & engineering, training and renting of measurement equipment.

Germany / Austria / Switzerland
info@althen.de

Benelux
sales@althen.nl

France
info@althensensors.fr

Sweden
info@althensensors.se

USA / Canada
info@althensensors.com

Other countries
info@althensensors.com