

N ALF232 | ALF 233



Description

- Measurement ranges ± 100 N to ± 5 kN
- Tension / compression
- Non-linearity 0.5 % RL
- Output signal 1.2 mV/V
- Supply voltage 10 VDC


The ALF232 measures forces in two axes at 90° and the ALF233 measures forces in 3 mutually perpendicular axes. Apart from error evaluations, each output is pure and requires no mathematical manipulation. The load cell is moment sensitive requiring calibration to be carried out at a specified force centre. The standard centre is specified in the specification. If this is not suitable for your application please consult our engineering department about alternative calibrations.

The ALF232/3 is ideally suited to many industrial and scientific applications, including automotive and medical research. The load cell can be manufactured with force ranges to suit the application. The Z axis can have a different force range from the X and Y axes. Please consult our engineering department about the viability of the required ranges. The example shown in the picture and drawing is a ± 500 N model; there will be small differences in the dimensions for other ranges.

Features

- 2 and 3 Axis version
- Simple installation
- Direct output from each axis without calculation
- Traceable calibration with certificate

Dimensions

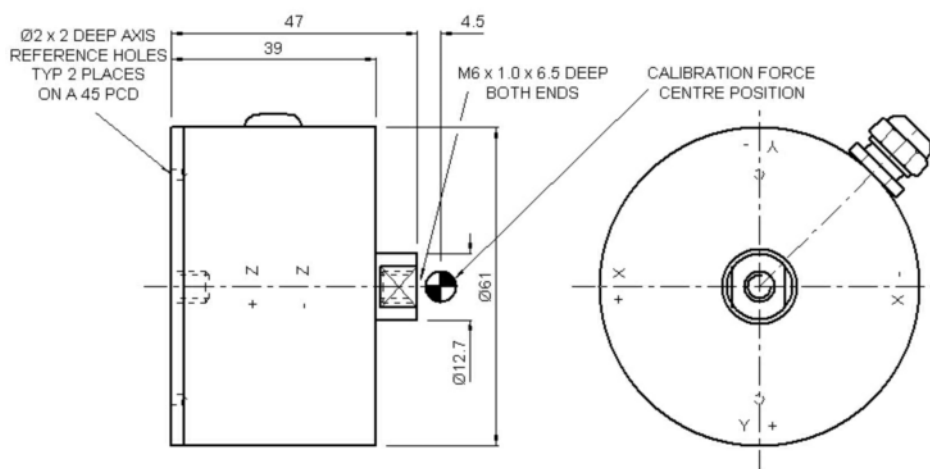

Model with 500 N rated load (example)

Dimensions in „mm“, approx. values

These drawings are for information only and not intended for construction purpose.

Please contact us for detailed drawings.

Specifications

Rated load:	100 N to 5 kN
Calibration:	compression, tension or compression/tension
Non-linearity, terminal:	±0.5 % RL
Hysteresis:	±0.5 % RL
Creep, 20 min:	±0.1 % AL
Repeatability:	±0.02 % AL
Maximum cross talk	3 % RL
Calibration force center:	x = 0, y = 0, z = -4.5 mm
Rated output, nominal:	1.2 mV/V
Zero load output:	±4 % RL
Temperature effect on rated output:	±0.005 % AL/K
Temperature effect on zero load output:	±0.01 % RL/K
Compensated temperature range:	-10 ... +50 °C
Operating temperature range:	-10 ... +80 °C
Supply voltage, recommended:	10 V
Supply voltage, max.:	10 V
Bridge resistance:	X and Y axis: 350 Ohm Z axis: 700 Ohm
Insulation resistance, minimum at 50 VDC:	500 MOhm
Overload, safe:	150 % RL
Overload, ultimate:	200 % RL
Weight (excl. cable):	approx. 200 g
Material:	Aluminium or stainless steel, depending on load range

Rated load	Structural stiffness, nom.	Rated load	Structural stiffness, nom.
100 N (per axis)	4.3 x 10 ⁶ N/m	5 kN (per axis)	2.1 x 10 ⁸ N/m

Notes:

1. RL = rated load
2. AL = applied load
3. Temperature coefficients apply over the compensated range.
4. Values apply to all axes unless otherwise specified.

Electrical Connections

The ALF232 is fitted with 2 m of PVC insulated 9 core screened cable type 7-1-9C. The ALF233 is fitted with 2 m of PVC insulated 12 core screened cable type 7-1-12C.

Wiring:

Function	X axis	Y axis	Z axis
+ supply voltage	red	violet	orange
- supply voltage	blue	black	turquoise
+ output signal	yellow	brown	pink
- output signal	green	white	grey

screen orange (thick)

The screen is not connected to the load cell body.

Ordering Information

ALF232-Zxxxx	2 axis loadcell	ALF233-Zxxxx	3 axis loadcell
--------------	-----------------	--------------	-----------------

Most ALF232/3 load cells are manufactured to special requirements and are given an ALF232-Zxxxx or ALF233-Zxxxx number. Please add range in the required units.

Safety note:

When using the load cell in tension mode it is essential to provide additional safety precautions like safety chains etc. for catching the load in a breakage, which cannot be excluded completely.

Due to continuous product development, ALTHEN and partners reserve the right to vary the foregoing details without prior notice.